

Telecom & Networking Power Solutions



Routers & Switches






Wireless equipment




Servers & Super computers



Storage Systems

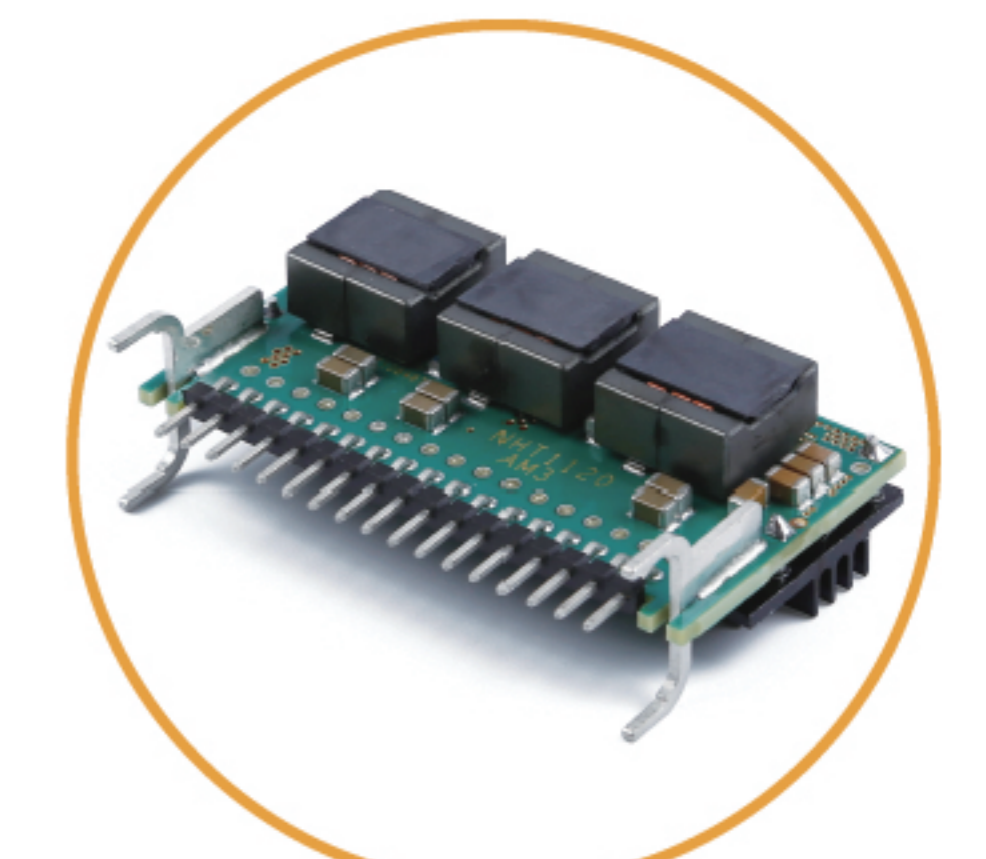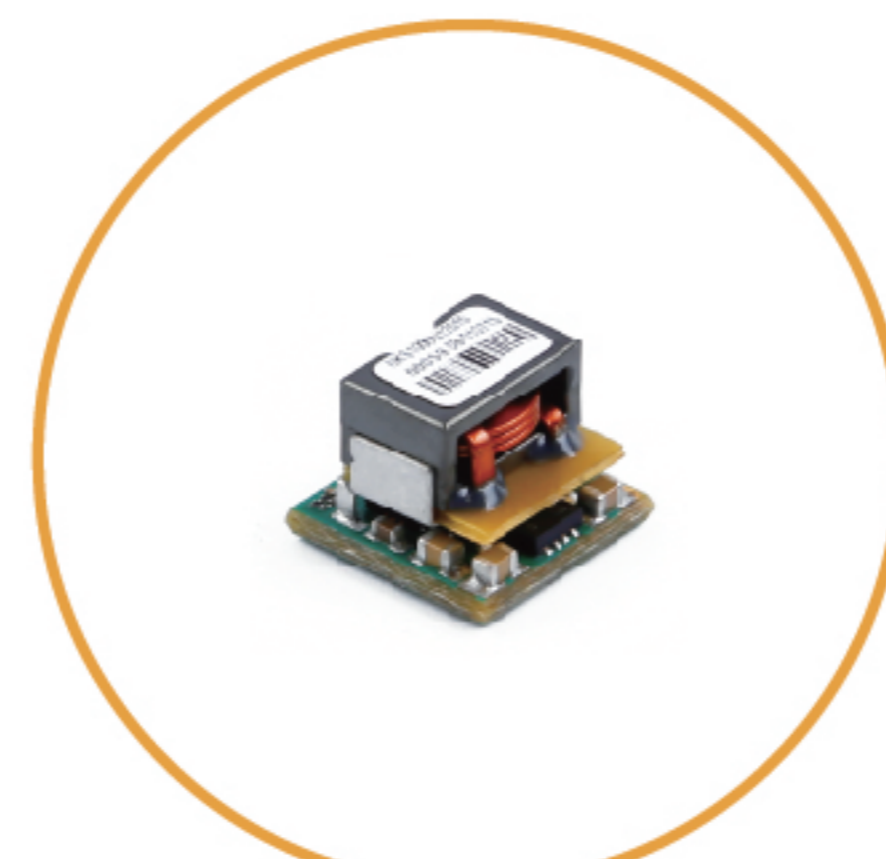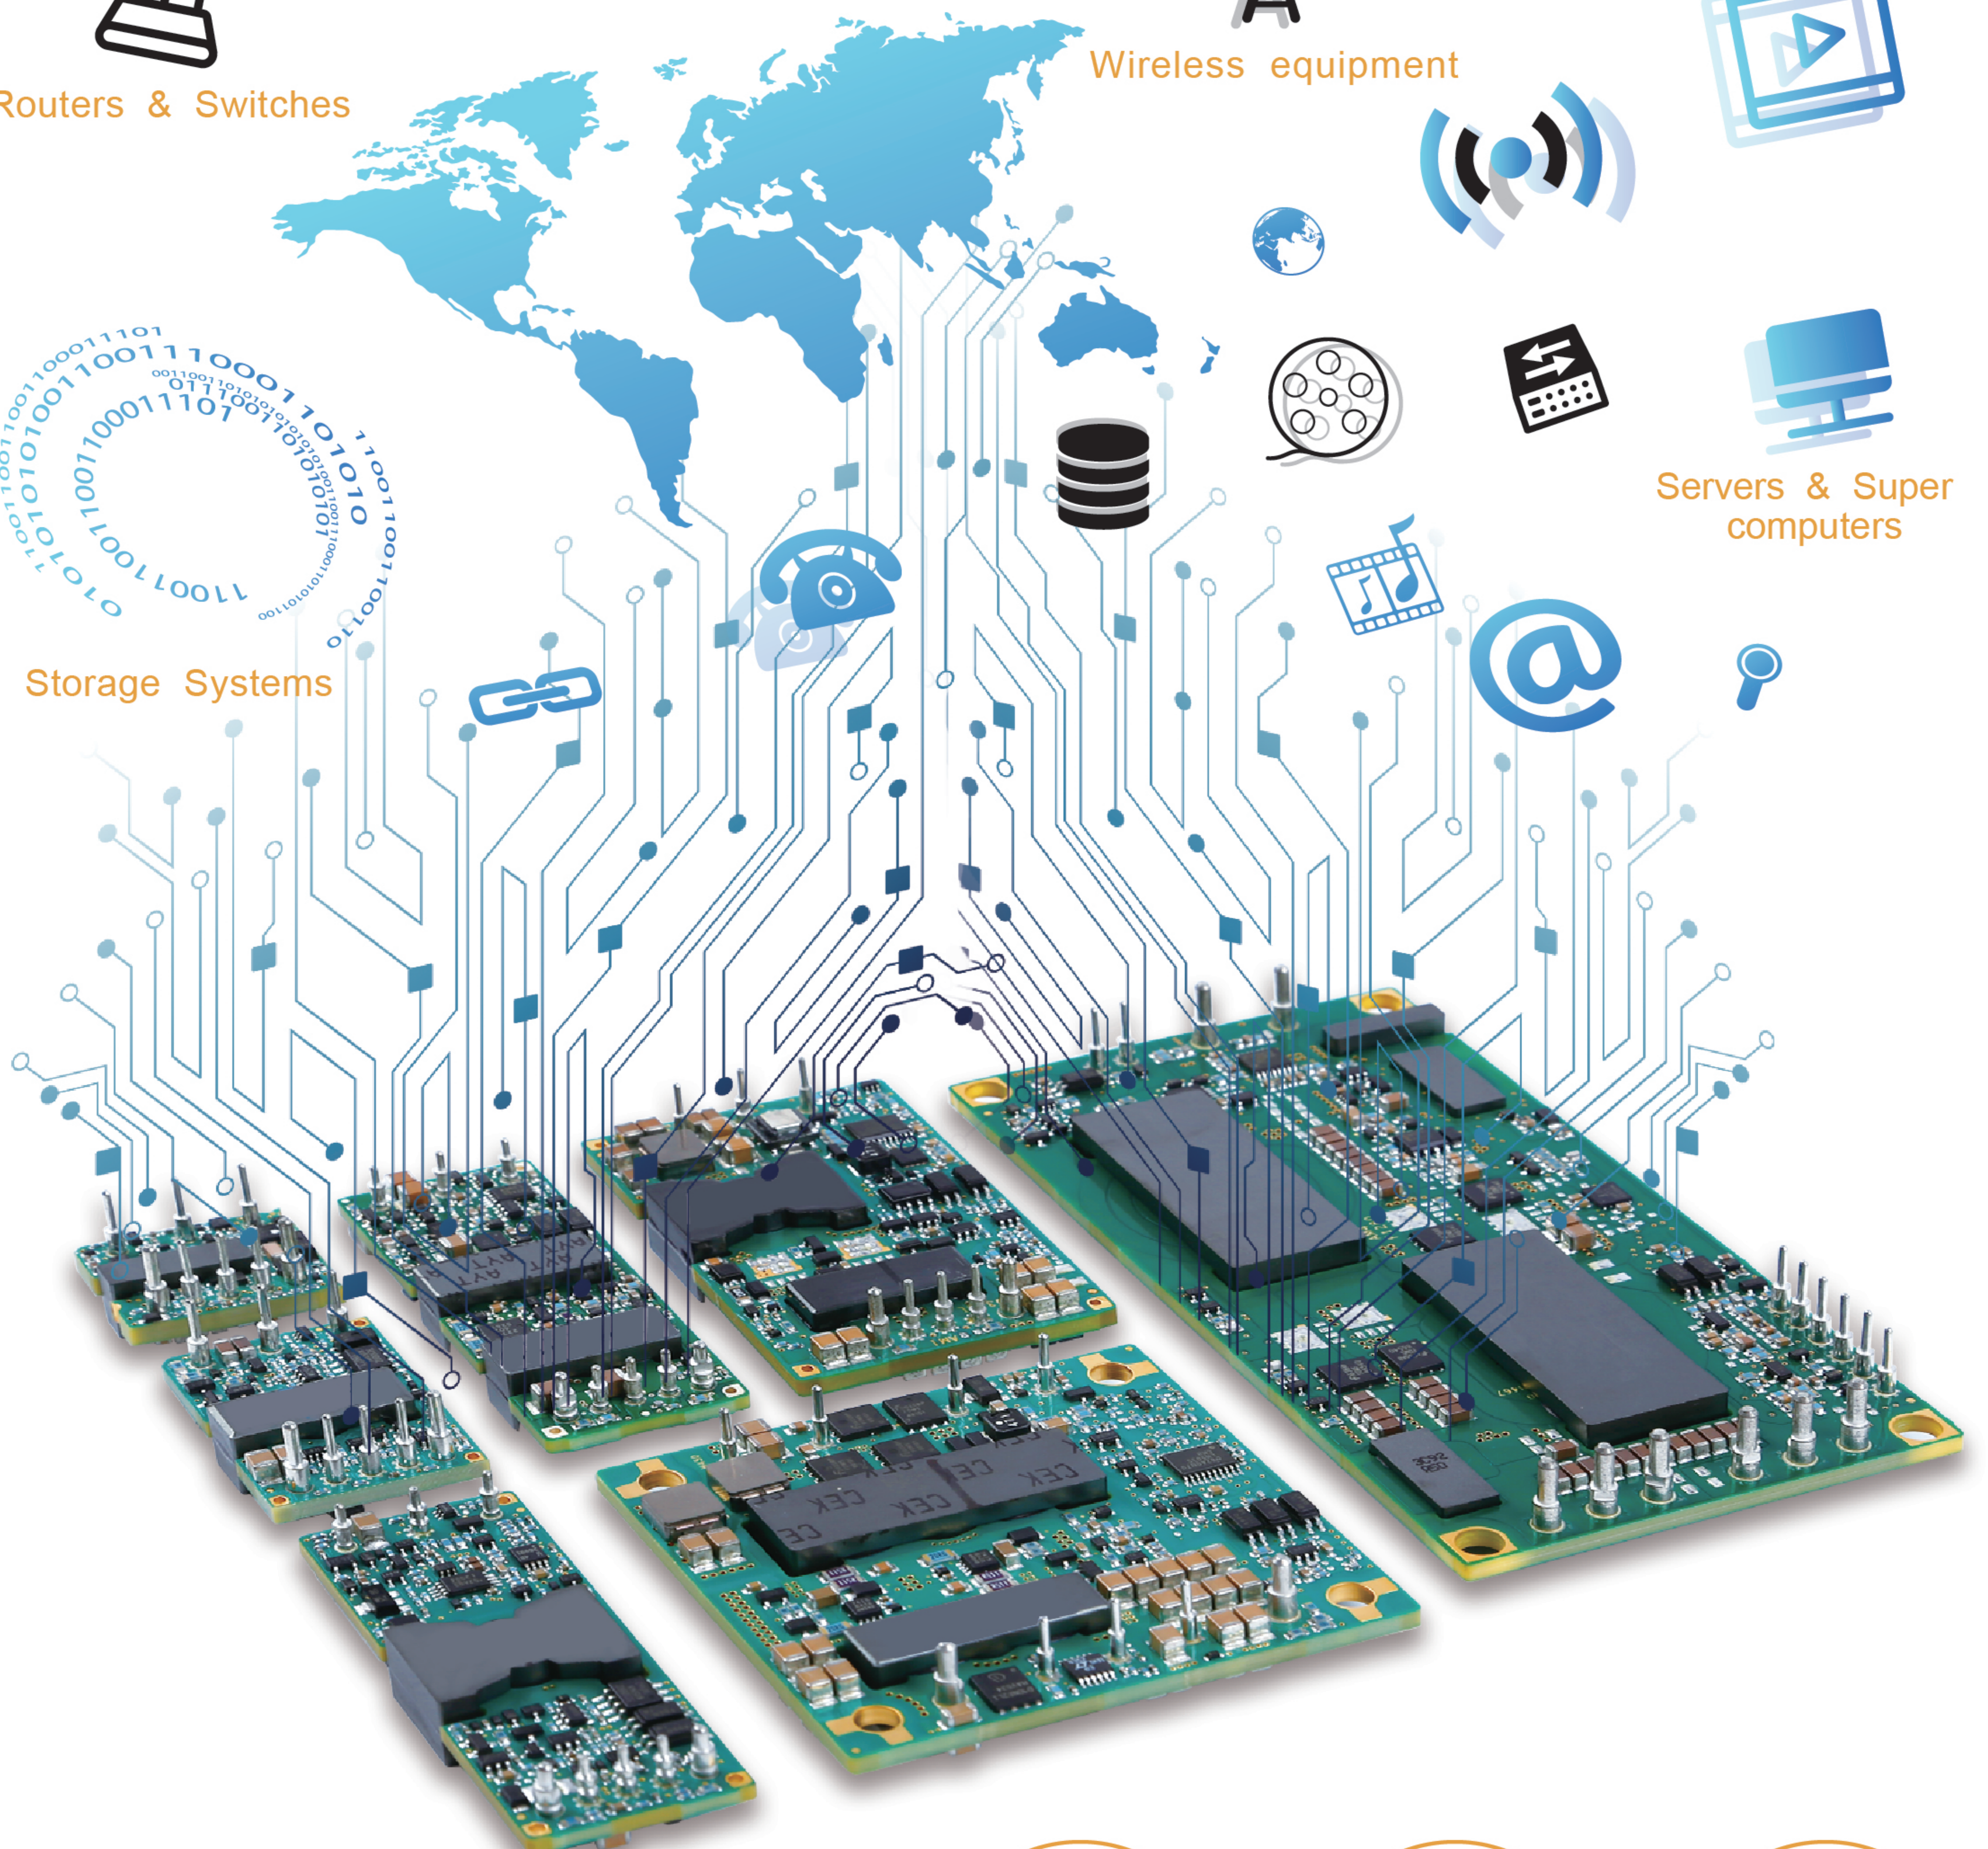

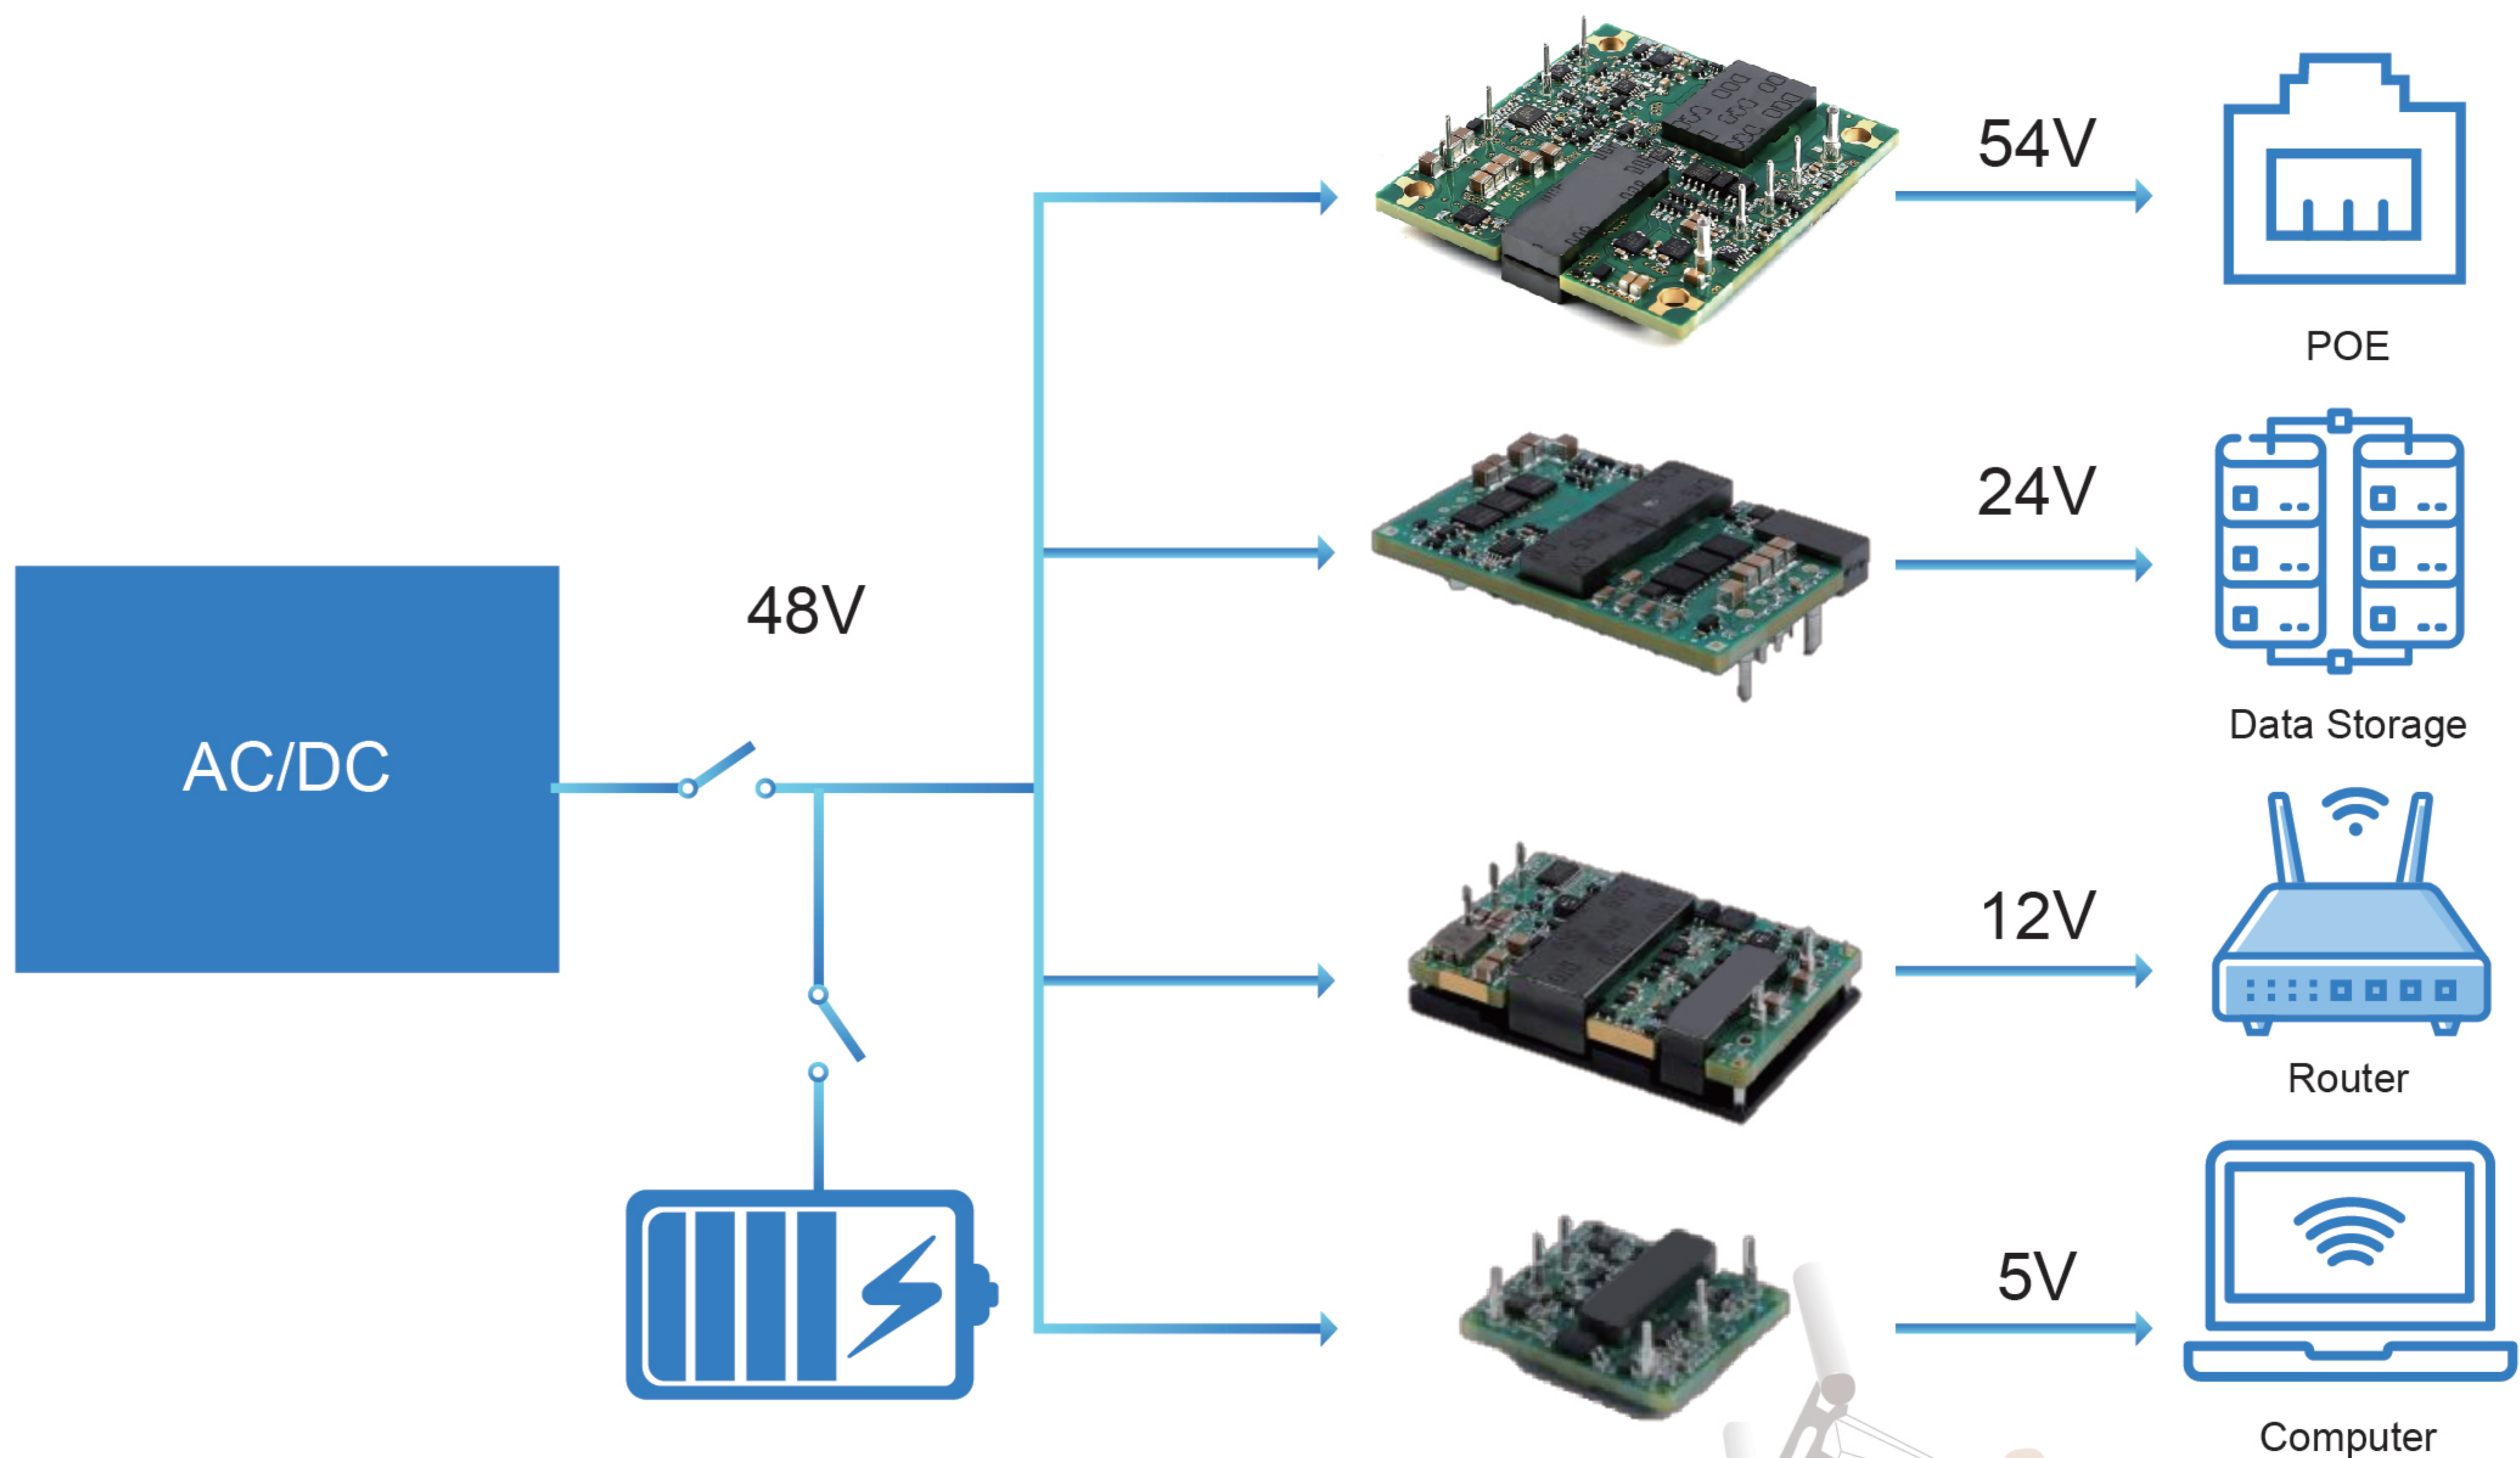

Typical Applications

Features:

- ◆ High efficiency and high density
- ◆ Output voltage from 3.3V to 54V
- ◆ Output power range from 1W to multi-kilowatts
- ◆ Current sharing on selected products
- ◆ 4:1 and 2:1 input ranges
- ◆ Adjustable output voltage
- ◆ Open frame, baseplate, SMD, DIP are optional
- ◆ Over-voltage, over-current, short-circuit, and over temperature protections
- ◆ Standard DOSA footprint from 1/32 brick to full brick
- ◆ Wide operating temperature range
- ◆ UL62368 recognized